

# CL Challenger Lifts



Challenger Lifts' Portable Mid-Rise Lift is a great way to increase the productivity in a shop. It's like having a service bay anywhere, indoors or out.

The motor is conveniently mounted to a Heavy-Duty tow dolly, making it easy to move and operate on almost any solid surface.

Exclusive features include a sliding/rotating arm design with rubber pads, low drive-over clearance, and much more.



**Model#: MR6**  
Portable Mid-Rise Lift  
6,000 lb. capacity

## MR6




**Model#: SRM10**  
10,000 lb. capacity  
Short-Rise Lift

## SRM10

The SRM10 is a great choice for brake and tire servicing needs. Dual hydraulic cylinders provide a 10,000 lb. lifting capacity picking up vehicles ranging from small passenger cars to light trucks.

Standard 2 position spotting blocks and auxiliary adapters reach a wide range of vehicle pick up points. Its small footprint compared to other lift models make the SRM10 a perfect fit.

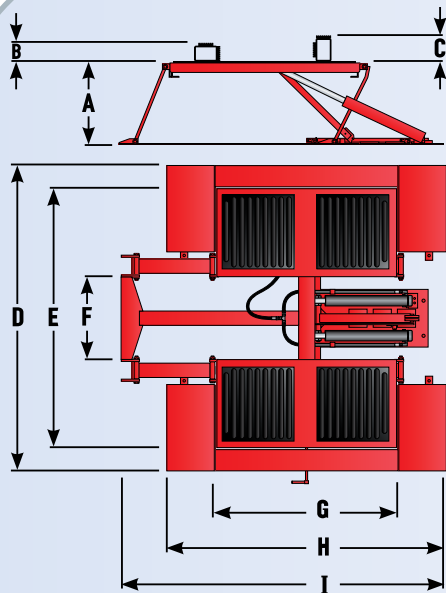

SRM10	Specifications
Lifting Capacity	10,000 lb. (4536kg)
<b>A</b> Raised Height	22" (559mm)
Lowered Height	4 1/2" (114mm)
Locking Bar Heights	13 13/16", 18 3/8", 21 1/4" (351mm, 467mm, 540mm)
<b>B</b> Low Adapter Position	4 3/4" (121mm)
<b>C</b> High Adapter Position	6 3/4" (171mm)
<b>D</b> Overall Width	85" (2159mm)
<b>E</b> Outside Width of Platforms	72" (1829mm)
<b>F</b> Width between Platforms	23" (584mm)
<b>G</b> Platform Overall Length	50" (1270mm)
<b>H</b> Ramp & Platform Overall Length	77 3/4" (1975mm)
<b>I</b> Overall Length	92 7/8" (2359mm)
Rearward Movement	13 1/4" (337mm)
Motor	1HP, Single Phase, 60Hz
Voltage	115v

**standard accessories:**



4 two position adapter blocks included  
Part#: SR10-001

**optional accessory:**




Four 4 1/8" spotting block auxiliary adapters  
Part#: 63100



Four 1 1/2" spotting block auxiliary adapters  
Part#: 63101WM

**Locking Positions:**

- 49 3/4"
- 45 5/8"
- 41 1/4"
- 36"
- 30"
- 22 7/8"

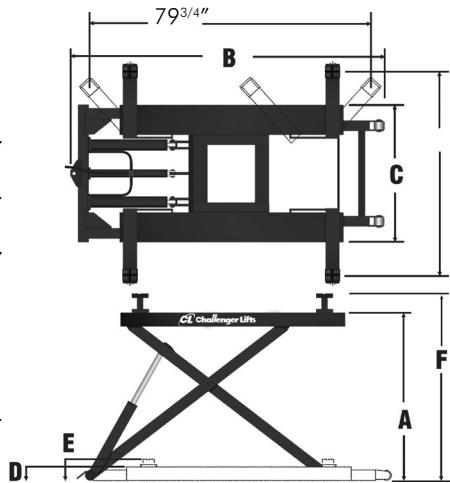

Model Number	MR6
Lifting Capacity	6,000 lb. (2722kg)
<b>A</b> Rise Height!	52 13/16" (1341mm)
<b>B</b> Length Overall	94" (2388mm)
<b>C</b> Width Overall	39 1/2" (1003mm)
<b>D</b> Min. Collapsed Table Height	5 1/2" (140mm)
<b>E</b> Pad Height (Min.)	8 5/8" (219mm)
<b>F</b> Pad Height (Max)	60" (1524mm)
Hydraulic Hose	144' (3658mm)
Safety Lock Positions	6
Electric Motor	1 HP
Voltage	115v
Speed of Rise	45 sec.
Min. Recommended Bay Size	120" x 264" (3048mm x 6706mm)

**standard accessories:**



4 high adapters included



4 low adapters included

Standard lift colors are Red (as shown) and Blue.

For more information, contact your Authorized Challenger Lifts Distributor:



The Automotive Lift Institute (ALI) certifies that the SRM10 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and is Third Party Validated by the ETL Testing Laboratory.

CHALLENGER LIFTS, INC.  
200 Cabel Street  
Louisville, Kentucky 40206

Phone Toll-Free: 800-648-5438  
502-625-0700  
Fax: 502-625-0711  
E-mail: sales@challengerslifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.