

Premium International Products Sourced Globally to Fit Your Needs Locally

**Model G-112 & G-122**



**Model G-112  
Swing Arm Style**



**Model G-122  
Pneumatic Tilt  
Tower style**



**Work Horse Performance At An Economy Price!**


[www.ServiceEquip.com](http://www.ServiceEquip.com) | 800-497-0009



# Model G-112 - Swing Arm style

for Passenger Cars and Lt Trucks

*Ideal for Light to Medium Volume Shops*

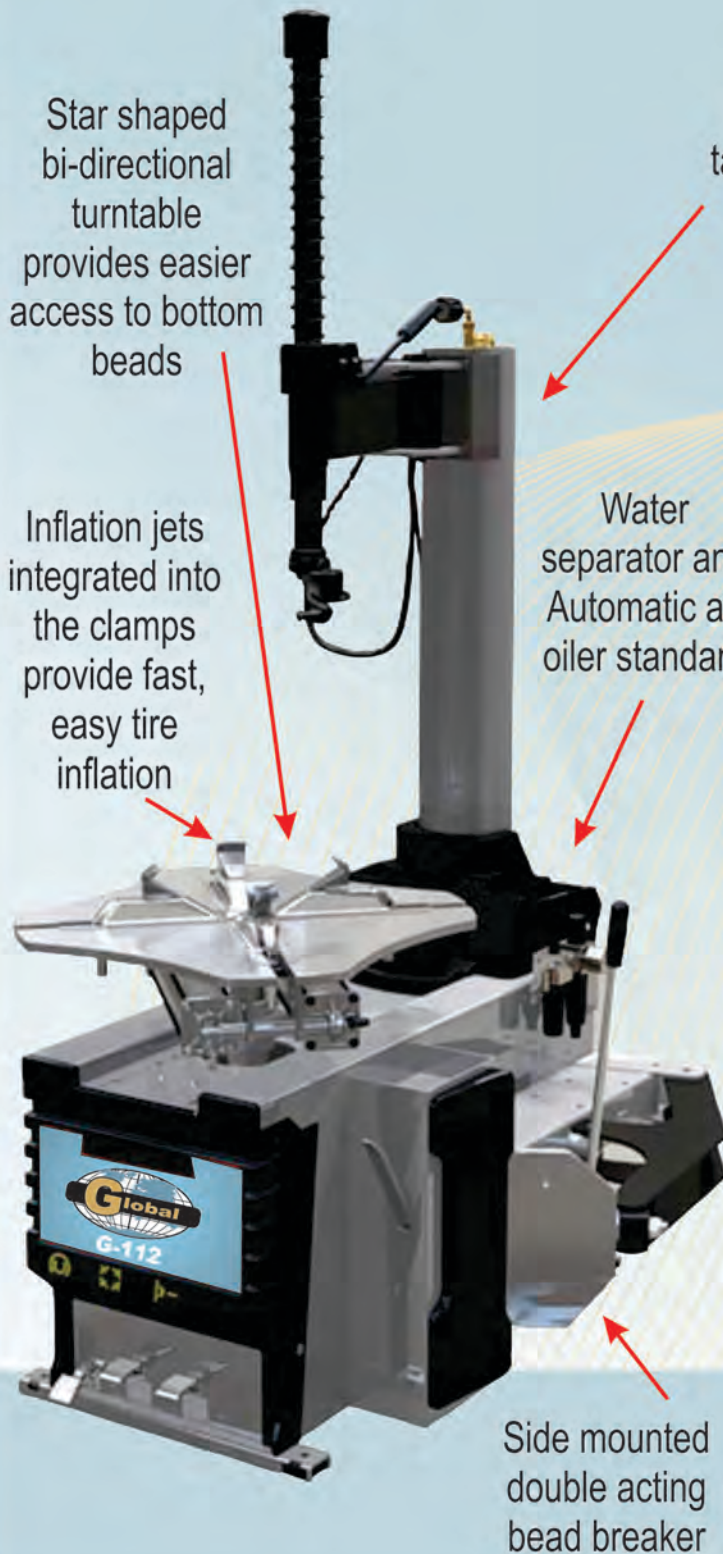

## Model G-112HP

with left side mounted pneumatic bead assist



**HIGH PERFORMANCE**



# Model G-122 Pneumatic Tilt Tower

*Ideal for  
Medium to  
Heavy Shops*



Telescopic horizontal arm easily slides for fast set-up against rim. Mount/demount head automatically locks and recesses away from the rim for safe scratch free changing.




Twin clamping cylinders provide superior clamping pressure for inside-out or outside-in clamping dependent on your preferred procedure.



Shown Model  
G-122HP  
with pneumatic  
bead assist tool

Side mounted bead breaker fitted with scratch proof coating is driven by stainless steel pneumatic cylinders for years of trouble free operation

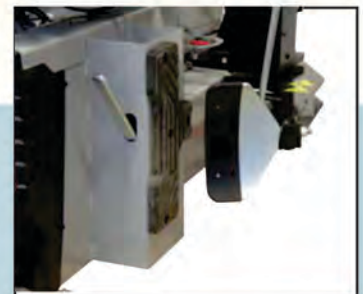



## Optional Accessories



801262417  
Plastic clamp for soft line rims



801250309  
Plastic mounting tool with adapter



8-11100036  
Motorcycle wheel clamp adapters



801435685  
Plastic clamp for Standard rims




8-11100041  
4" extensions increase  
max diameter by 4"




8-11100051  
Quick Release adapter  
for 8-01250309  
polymer mounting head

G-122

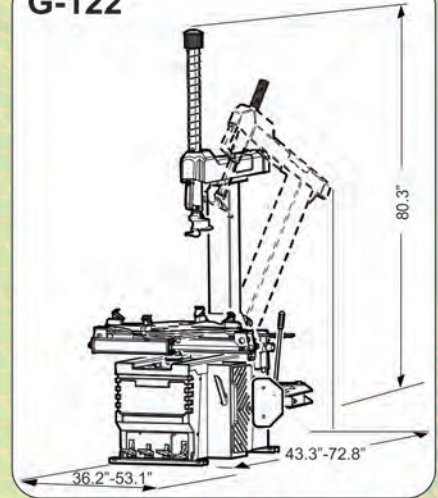

G-112

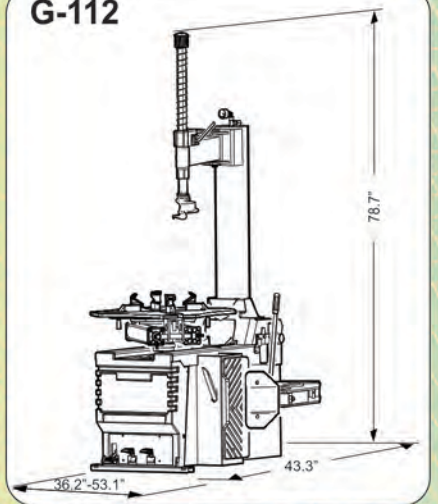

## Specifications

	Model G-112	Model G-122
Power Supply	115V 60Hz	115V 60 Hz
Inside Clamping capacity (dia)	12" to 24"	12" to 24"
Outside clamping capacity (dia)	10" to 22"	10" to 22"
Bead breaking force	2697 ft/lbs	2697 ft/lbs
Bead breaker opening	15.5"	15.5"
Max tire diameter	44.5"	44.5"
Max wheel width	14"	14"
Working pressure	100-145 psi	100-145 psi
Turntable rotation speed	6 rpm	6 rpm
Shipping weight	603 lbs	640 lbs



**Local Global Distributor**